



Evoked 2400B Bi-color

LED Spot Light

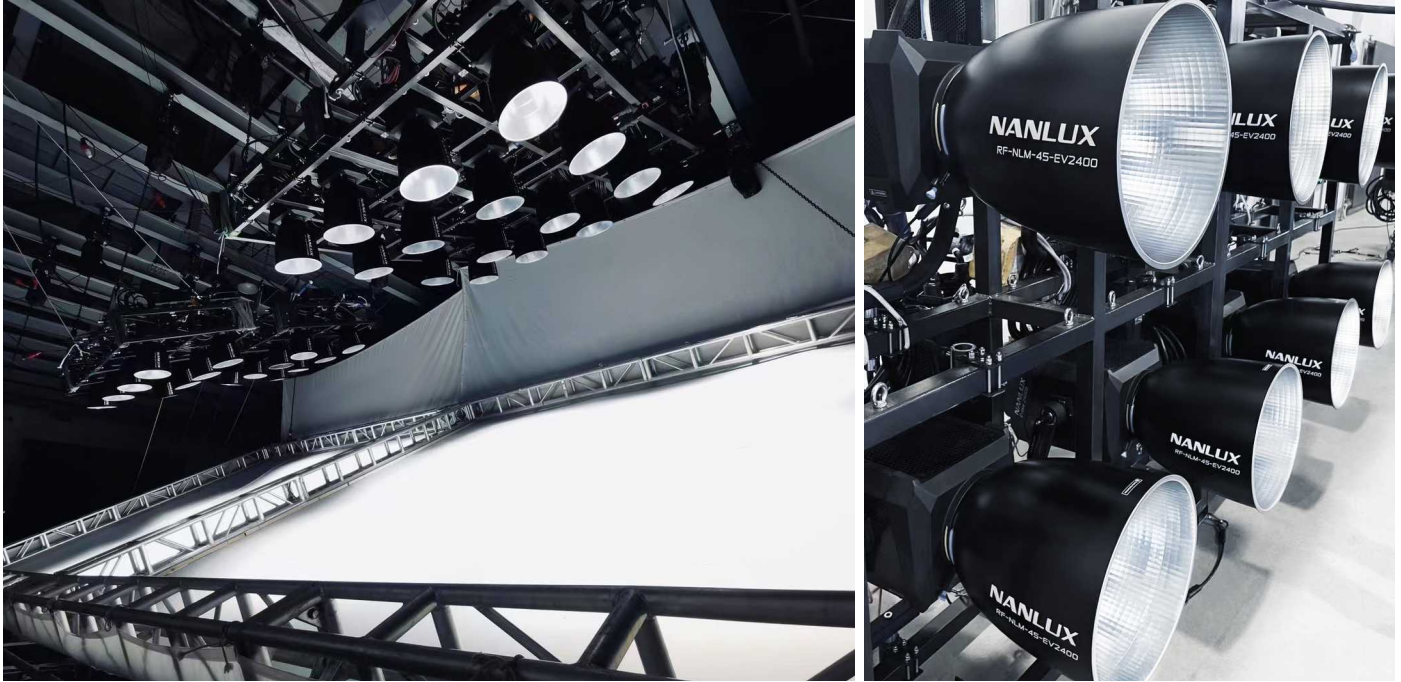

1. Ultra high luminance of 41,910 lux @3m (at 5600K, with 45° reflector) that comparable to a 10K Tungsten or 4K HMI light
2. Wide CCT range of 2700K-6500K with G/M±80 adjustment
3. Built with electronic contacts, enable modifier recognition function
4. IP55 of both fixture and power supply providing thorough protection
5. Fully dimmable from 0 to 100% with 0.1% increment
6. Adjustable cooling system includes SMART, FULL SPEED, LOW SPEED, OFF modes
7. Comprehensive wired and wireless controls

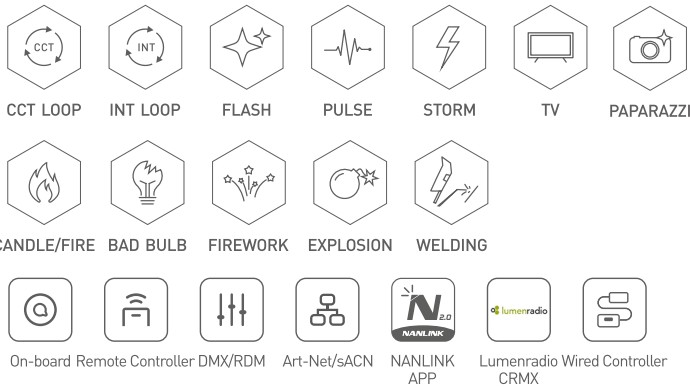

Includes

Evoked 2400B × 1, Yoke × 1, Power Supply × 1, DC Connection Cable 7.5M × 1, AC Power Cable (2.5M+1M) × 1, AS-CP-QR-EV Quick Release Clamp × 1, WS-RC-C2 Remote Controller × 1, USB Flash Drive × 1, User Manual × 1, CC-EV2400-FT-F0 Flight Case × 1, RF-NLM-45-EV2400 Reflector 45° with Soft Bag × 1 (packed separately)

*3.5M AC Cable with Edison Connector for 110V voltage countries, for switching the power from 1700W (15Amp) to 2200W (20Amp).



Nanlux Global

Multiple Accessories, More Applications



Evoke 2400B Technical Data

Model	Evoke 2400B
Rated Power	2400W
Input Voltage/Current	DC48V/26A × 2, AC100V-240V 50/60Hz 26A Max
CCT	2700K-6500K (G/M±80)
CRI	Average 96
TLCI	Average 97
TM-30	Rf: Average 95 / Rg: Average 100
Dimming	0-100%, stepless 0.1% from 0-100%
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wired Controller
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding
Product Size	Light Fixture (without COB protective cap): 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm / 15.3 × 6.8 × 10.6"
Product Weight	Light Fixture (without COB protective cap): 15kg / 33.1lb Power Supply: 11.58kg / 25.53lb

Illumination (lux / fc)

CCT	Distance	Light Only	With 45° Reflector
3200K	3M	8732 lux / 811 fc	36710 lux / 3410 fc
	5M	3478 lux / 323 fc	12270 lux / 1140 fc
	7M	1848 lux / 172 fc	6381 lux / 593 fc
	9M	1152 lux / 107 fc	3872 lux / 360 fc
5600K	3M	9584 lux / 890 fc	41910 lux / 3893 fc
	5M	3801 lux / 353 fc	14070 lux / 1307 fc
	7M	2028 lux / 188 fc	7254 lux / 674 fc
	9M	1266 lux / 118 fc	4401 lux / 409 fc