

# VELVET Light 2 IP54


Ref.: VL2IP54

Datasheet: June 2021 / Page 1



**Bicolor weatherproof, IP54  
soft light LED panels**

[Click here for more product information](#)

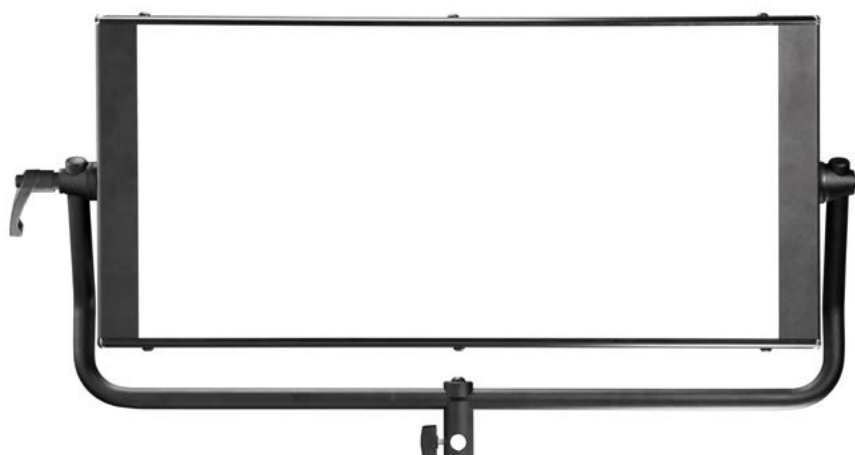

1. Power switch
2. XLR-3 DC In
3. +/- Adjustment buttons
4. 3200K/ 5600K Quick access button
5. Mode selection button (Dimmer/ Colour Temp)
6. Digital display
7. XLR-5 DMX In & Out



# VELVET Light 2 IP54


Ref.: VL2IP54

Datasheet: June 2021 / Page 2



<b>COLOUR TEMPERATURE</b>	adjustable from 2700K to 6500K in 100K steps
<b>LIGHT INTENSITY</b>	dimnable 0 to 100, smooth and flicker-free
<b>TLCI</b>	95 at 3200K and 95 at 5600K
<b>DIMENSIONS</b>	670x308x68mm (panel) 770x435x68mm (panel+yoke)
<b>WEIGHT</b>	5.9 kg (panel) 6.5 kg (panel + yoke)
<b>POWER DRAW</b>	150W
<b>POWER SUPPLY</b>	24-35V DC V-Lock or Gold mount battery plate 90-264V AC 50/60Hz
<b>BEAM ANGLE</b>	100°
<b>PHOTOMETRICS</b>	4000 lux / 370 fc at 1m / 3 feet 580 lux / 53 fc at 3m / 10 feet
<b>LED RATED LIFE</b>	more than 50,000 hours L70 more than 35,000 hours L80
<b>POWER CONNECTION</b>	Neutrik XLR-3 DC In connector
<b>DMX</b>	DMX-RDM with XLR-5 IN connector
<b>OUTPUT FREQUENCY</b>	2000 fps
<b>TEMPERATURE COOLING</b>	from -20°C to +40°C no-noise, fan-free passive cooling
<b>PROTECTION</b>	IP54 weatherproof, indoor or outdoor use
<b>VELVET LED TECHNOLOGY</b>	Selected BIN LED + optic diffuser + CPU software control
<b>RIGGING OPTIONS</b>	Aluminum yoke with 16 female combined with 28 pin, quick link swivel ball head, pole operated yoke, multipanels yokes
<b>QUICK MOUNTING ACCESSORIES</b>	AC power supply, double Vlock or Gold adapter, DMX 512 splitter cable in&out, foldable Snapgrid, removable barn doors, cordura case, hard case
<b>CONSTRUCTION &amp; FINISH</b>	Black anodized extruded aluminum and black powder coated sheet aluminum

## WIRE VIEW

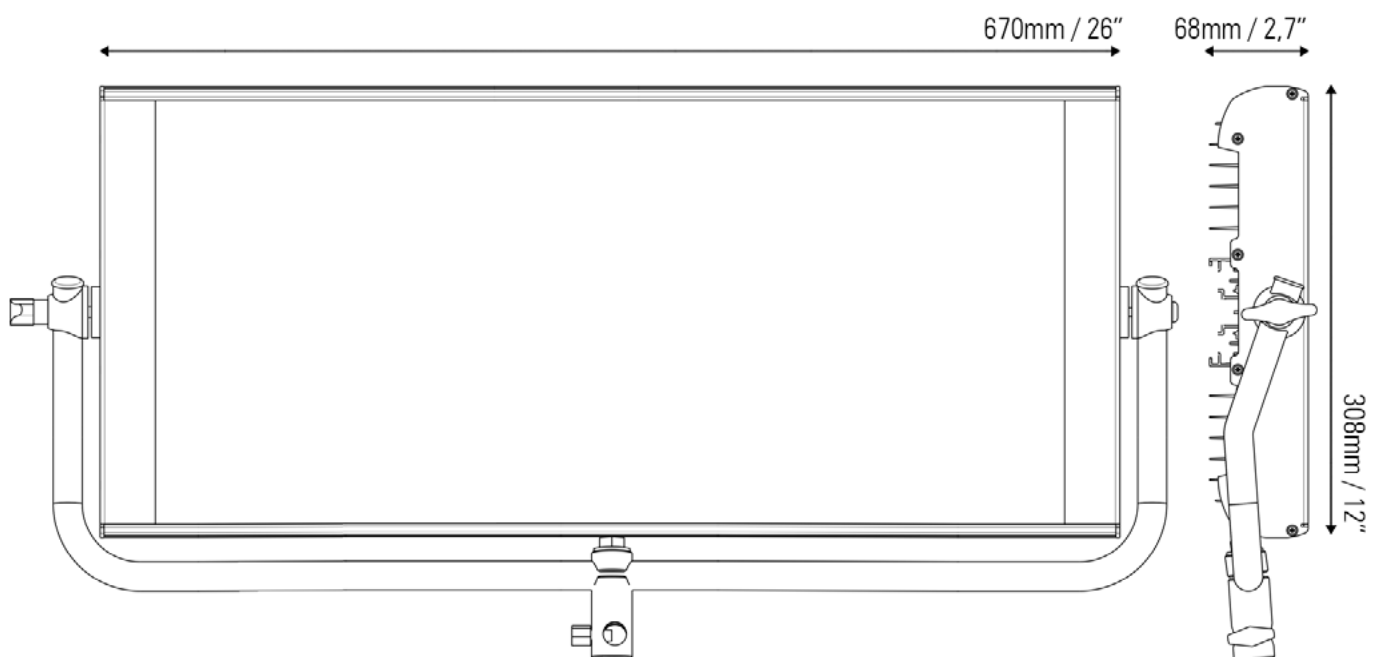




# VELVET Light 2 IP54

Ref.: VL2IP54


Datasheet: June 2021 / Page 3



## PHOTOMETRICS

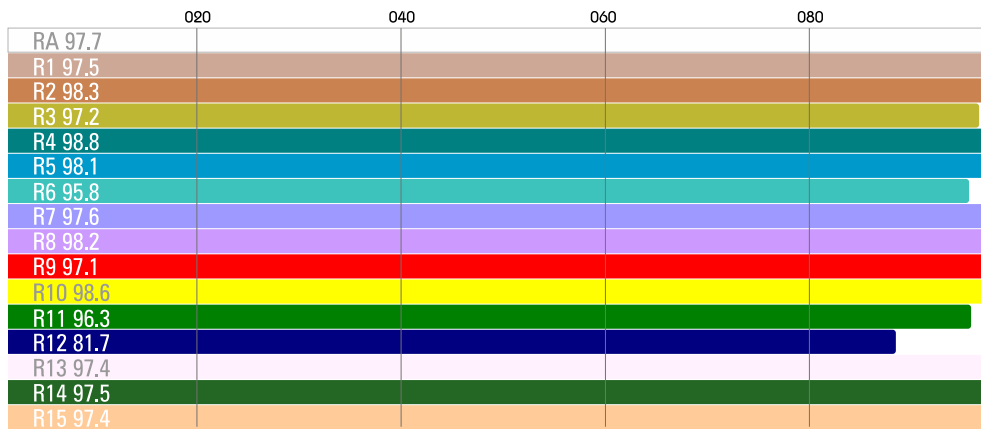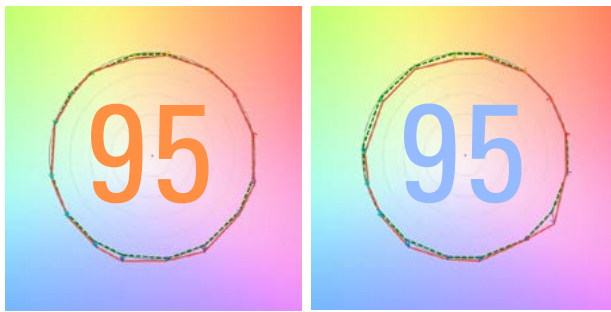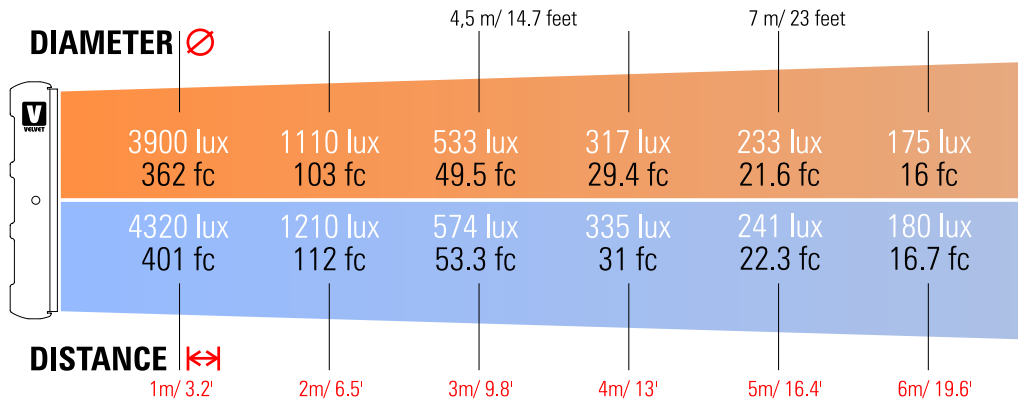

## CCT 3270K

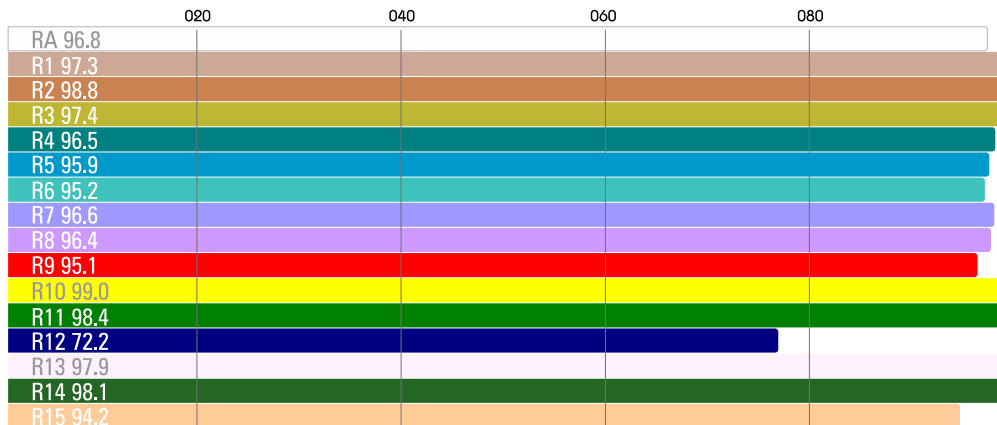

## CCT 5740K















# VELVET Light 2 IP54

Ref.: VL2IP54

Datasheet: June 2021 / Page 4



## ACCESSORIES

POWER SUPPLY		BATTERY ADAPTERS	
 VL-PSU180W	 VLIP54-PSU180W	 VL2-VLOCK	 VL2-GOLD
BEAM CONTROL			
 VL2-RB	 VL2-SG	 VL2-SG20	
 VL2-SG60	 VL2-SB	 VL2-SGXSB	
TRANSPORT		RIGGING	REMOTE CONTROL
 VL2-BAG	 VL2-CASE	 VL2-QLS	 VL-RC