





Aladdin 350W DIMMER with DMX

**USER MANUAL** 

# THANK YOU FOR YOUR PURCHASE

User Manual

Version: 1.0

Aladdin Lights info@aladdin-lights.com

# **START-UP GUIDE**



1	ON / OFF switch
2	Antenna mount
3	Bracket with 3/8" thread



4	Color temperature dial
5	Dimming dial
6	Panel connector socket
7	DMX output (5-pin)
8	DMX input (5-pin)
9	AC adapter input

## **STATES**

The OLED display shows you different informations about the states.


OLED		STATE
T-D 3200K	100%	Ordinary state shows the color temperature in the left corner and the dimming percentage in the right corner.
3152K	100%	While changing the color temperature the number enlarges. The dimming percentage appears in the right corner.
DMX512 5600K	75.8%	When connected to a DMX console or Lumenradio the display shows the color and dimming values and the DMX512 text in the top left part of the screen.
T-D 3200K	LOCK	When locked by the user the display shows a "LOCK" text. You can lock/unlock the dimmer by pushing the MENU button for 2 seconds.

# **OPERATION**

With the (MENU) button you can get into the menu and change settings. Navigate with the (MENU) and (UP / DOWN) buttons.

OLED		OPERATION
DMX CH	>0 0 1	Set the DMX channel number by pushing the MENU button to change between the 3 columns and the UP / DOWN buttons to change the value (ranges from 1 - 512).
DMX 512	Radio	Choose the DMX method (DMX cable / Lumenradio). The dimmer automatically restarts to save the settings.
RF Link Reset	YES	To clear the link ID of the Lumenradio transmitter set this parameter to YES. Then confirm by pressing MENU.

### **POWER ADAPTER**

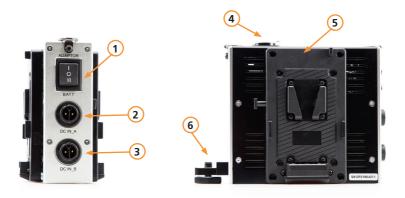

1	Switch to select between AC adapter and batteries
2	DC in (A)
3	DC in (B)
4	DC socket to dimmer unit
5	V-Mount plate
6	Mount for dimmer

Connect the Power Adapter with the dimmer (4). You can mount the dimmer directly onto the power box (6). You can use two batteries or AC adapters to power the main dimmer unit. Just push the switch to the required position.

### **IMPORTANT CAUTIONS AND WARNINGS**

- You must set the sheet type (see OPERATION) before connecting to a panel.
- Do not use near flammables and heaters.
- Do not expose the unit to direct sunlight for a long period (applies also for storing in a car).
- Do not damage the product with improper force or cause any impact with heavy objects.
- Keep out of reach of children.

- Use the product only within temperature range of  $-10^{\circ}\text{C} +40^{\circ}\text{C}$ .
- When you have technical problems while using the product, stop using it immediately and contact your dealer / reseller.

#### **WARRANTY**

We provide a one year warranty period after the purchase. This warranty covers repairs or a replacement for faulty products within this period. After this warranty has been expired, you can still get repairs for your product which will be charged extra.

Aladdin Lights reserves the right to refuse warranty service on products under disputable conditions.

#### WARRANTY EXCLUSIONS

In case of any of the below listed causes, the warranty does not apply, even if it is within the free warranty period.

- Product failure due to consumer negligence.
- Product failure due to usage of not compatible power sources.
- Product failure due to disassembly by not official resellers/distributors.

### **SELECTED OPTIONAL ACCESSORIES**



# **TECHNICAL SPECIFICATIONS**

Article code	FBS350BIMADIM
Compatibility	FABRIC-LITE 35
Dimmer	Dimming: (0.5%–100%)
Cooling	Passive cooling
Power input	3-pin socket (for power adapter)
Power consumption	350W
Dimensions	200mm(W) x 150mm (H) x 168mm
Weight	2000g
User interface	Graphic OLED (128x64)
Temperature range	-10°C - +40°C
DMX512 support	In (5-pin) and out (5-pin) / Lumenradio
DMX512	2 channels - White Bi-Color
Dimming range	0.5% - 100%
Temperature range	2800K - 6100K

