



## MK350N Premium

Handheld Spectrometer

### Specification

Spectrum		
Sensor	CMOS Linear Image Sensor	
Wavelength Range	380 to 780 nm	
Wavelength Data Increment	1 nm	
Spectral Bandwidth	Approximately 12 nm (Half Bandwidth)	
Wavelength Reproducibility	$\pm 1 \text{ nm}^{*1}$	
Measurement Range	5 to 100,000 lx	
Illuminance Accuracy	Illuminant A @ 2,856 K at 20,000 lx <sup>*2</sup>	$\pm 2.5\%$
Illuminance Repeatability (2 $\sigma$ )		0.2% ( 100 to 100,000 lx ) 0.5% ( 5 to 100 lx )
Color Accuracy		x y: $\pm 0.002$ (100 to 100,000 lx) x y: $\pm 0.0025$ (5 to 100 lx)
Color Repeatability (2 $\sigma$ )		x y: 0.0002 (500 to 100,000 lx) x y: 0.0004 (30 to 500 lx) x y: 0.001 (5 to 30 lx)
CCT Accuracy		$\pm 2\%$
CRI Accuracy @ Ra		$\pm 1.5\%$
Stray Light		-25 dB max. <sup>*3</sup>
Integration Time Range	100 us to 1,000 ms	
Digital Resolution	16 bits	
Flicker		
Measurement Range	5 to 100,000 lx	


Sampling Rate	100k sample/sec
Frequency Range	5 to 50k Hz
Frequency Resolution	2, 4, 8, 16, 32 Hz
Accuracy	5% (5 to 30K Hz) <sup>*6</sup>
<b>Feature</b>	
Capture Function	One time / Continuous
Operation Mode	Standalone Mode / WiFi Mode <sup>*4</sup> USB Mode ( MSC Mode <sup>*5</sup> +PC connection )
Integration Mode	Auto/Manual
Measuring Modes	1. Basic Mode
	2. Spectrum Mode
	3. CRI Mode
	4. CIE 1931/1976 Chromaticity Mode
	5. TM-30-15 Mode
	6. Flicker Mode
	7. Frequency Mode
	8. Browser Mode
	9. Compare Mode
Measuring Capabilities	1. Illuminance (LUX)/Foot Candle (fc)
	2. Correlated Color Temperature (CCT)
	3. CIE Chromaticity Coordinates (1) CIE 1931 x,y Coordinates (2) CIE 1976 u',v' Coordinates (3) CIE 1931 XYZ Value
	4. $\Delta x$ , $\Delta y$ , $\Delta u'$ , $\Delta v'$
	5. Delta uv (Duv)
	6. Dominant Wavelength ( $\lambda_d$ )
	7. Excitation Purity (%)
	8. Color Rendering Index (CRI, Ra)/R1 to R15
	9. Color Quality Scale (CQS)
	10. Television Lighting Consistency Index (TLCI)
	11. Blue-ray % (BL%)
	12. TM-30-15 (Rf, Rg, Color Vector Graphic)
	13. Flicker Frequency
	14. Percent Flicker
	15. Flicker Index
	16. Stroboscopic Effect Visibility Measure (SVM)

	17. Flicker Risk - IEEE PAR1789
	18. Spectral Power Distribution (SPD) $\text{mW/m}^2$
	19. Irradiance ( 380nm~780nm ) ( $\text{W/m}^2$ )
	20. Peak Wavelength ( $\lambda_p$ )
	21. Peak Wavelength Value ( $\lambda_{pV}$ )
	22. Integration Time (I-Time)
	23. Scotopic and Photopic Ratio (S/P)

## System Configurations

Display	3.5" 320X240 Resistive Touch LCD
Max. Files	≈ 68,000 Files @ 8GB SD Card ( Excel + JPG )
Battery Operation Time	≤ 5 hours / Fully Charged
Power	Adapter; 2500 mAh ( 3.7V Rechargeable Li-ion Battery )
Data Output Interface	SD Card ( SD2.0,SDHC / up to 32G ) / Mini USB Port ( USB 2.0 ) / WiFi SD Card compatible with iOS and Android
Data Format	Compatible Excel / JPG
Dimensions	147.5 x 78 x 24 mm ( H x W x D )
Weight ( with Battery )	225 g ± 10 g
Operating Temperature / Humidity	0 to 35 °C, relative humidity 70% or less without condensation
Storage Temperature / Humidity	-10 to 40 °C, relative humidity 70% or less without condensation
Display languages	English / Traditional Chinese / Simplified Chinese / Japanese / Spanish / German / French / Italian / Russian

## Cosine Correction

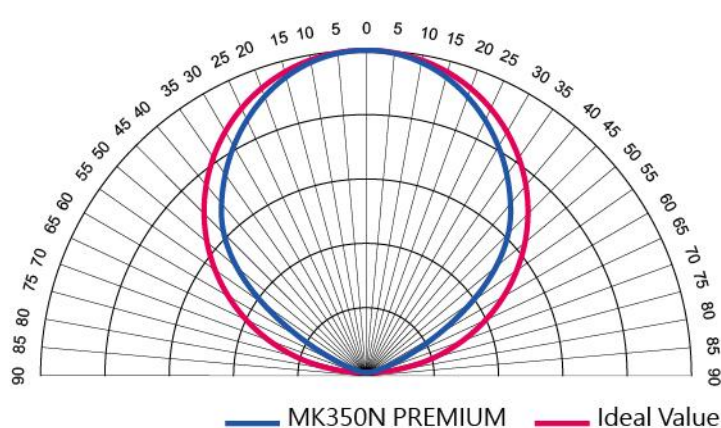

\*1 : Input source must be a stable light source.

\*2 : Temperature  $23 \pm 2^\circ\text{C}$  and relative humidity 50% or less.

\*3 : Input the 550nm monochromatic light and measure the stray light ratio at  $550\text{nm} \pm 40\text{nm}$ .

\*4 : It can be connected to mobile phones and tablets.

\*5 : MSC- Mass Storage Class.

---

\*6 : Test condition is based on Lux > 300 lux of sine wave light source.

---

The company reserves the right to change product specifications at any time without prior notice.