

# VELVET Power 2 Spot 15° IP54

Ref.: VP2IP54

Datasheet: June 2021 / Page 1



## Bicolor weatherproof concentrated long distance beam light LED panels

[Click here for more product information](#)

**VP2IP54SP includes:** 1x VELVET Power 2 Spot 15° IP54 LED panel, 1x yoke with 28mm Junior pin-16mm baby receiver



1. Power switch
2. XLR-3 DC In
3. +/- Adjustment buttons
4. 3200K/ 5600K Quick access button
5. Mode selection button (Dimmer/ Colour Temp)
6. Digital display
7. XLR-5 DMX In & Out



# VELVET Power 2 Spot 15° IP54


Ref.: VP2IP54

Datasheet: June 2021 / Page 2



<b>COLOUR TEMPERATURE</b>	adjustable from 2700K to 6500K in 100K steps
<b>LIGHT INTENSITY</b>	dimnable 0 to 100, smooth and flicker-free
<b>TLCI</b>	98 at 3200K and 97 at 5600K
<b>DIMENSIONS</b>	690x308x68mm / 27"x12"x2.7" panel 815x430x68mm / 32"x17"x2.7" panel + yoke
<b>WEIGHT</b>	7 kgs / 15,5 lbs panel 7.6kgs / 16.7 lbs panel + yoke
<b>POWER DRAW</b>	190W
<b>POWER SUPPLY</b>	24-35V DC via XLR3 V-Lock or Gold mount battery plate 90-264V AC 50/60Hz
<b>PHOTOMETRICS</b>	25000 lux / 2315 fc at 1m / 3 feet 4000 lux / 370 fc at 3m / 10 feet 1000 lux / 93 fc at 6m / 20 feet
<b>BEAM ANGLE</b>	15° nominal with filter D25 30° D50 45° D100 90° DVELVET 105°
<b>LED RATED LIFE</b>	more than 50,000 hours
<b>OUTPUT FREQUENCY</b>	16KHz flicker-free up to 2000fps
<b>COOLING</b>	no-noise, fan-free passive cooling
<b>PROTECTION</b>	IP54 weatherproof, indoor or outdoor use
<b>CONSTRUCTION &amp; FINISH</b>	Made of black powdercoated extruded and sheet aluminum
<b>VELVET LED TECHNOLOGY</b>	selected BIN high-power LED + VELVET custom optics + CPU software control
<b>ACCESSORIES</b>	Quarter, half and full hard diffusion, foldable Snapbag diffuser kit, foldable 20°, 40° or 60° Snapgrids, removable barndoors, AC power adapter, V-Lock or Gold Mount battery mounts, remote control, Cordura carrying bag, hard case
<b>RIGGING OPTIONS</b>	aluminum yoke with 16 baby receiver combined with 28 junior pin, multiple 1/4-20" rigging points, multipanel yokes, pole-operated studio yoke

## WIRE VIEW

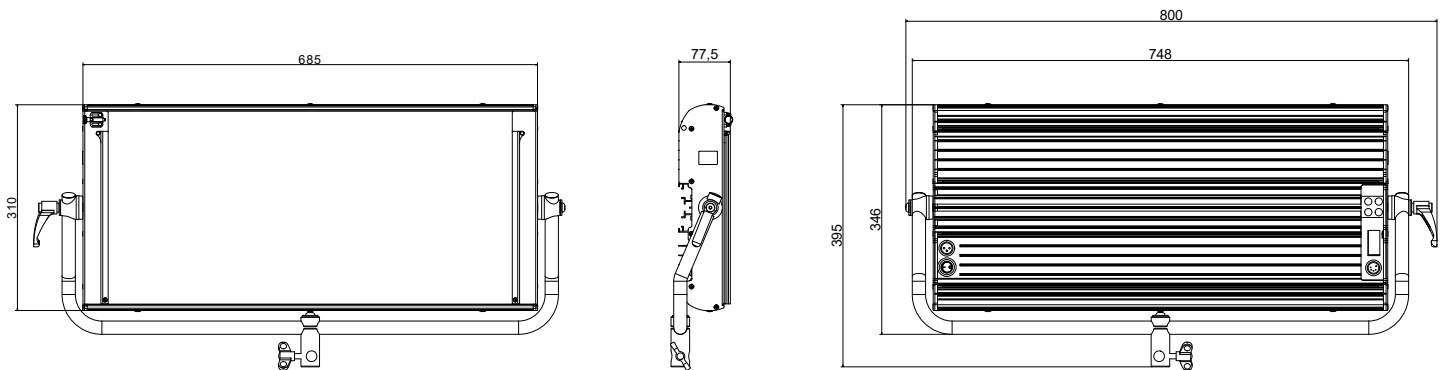




# VELVET Power 2 Spot 15° IP54

Ref.: VP2IP54


Datasheet: June 2021 / Page 3



## PHOTOMETRICS

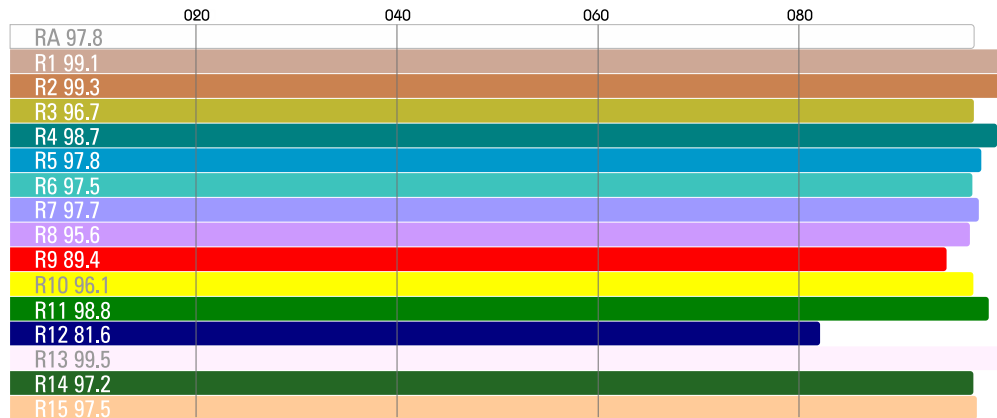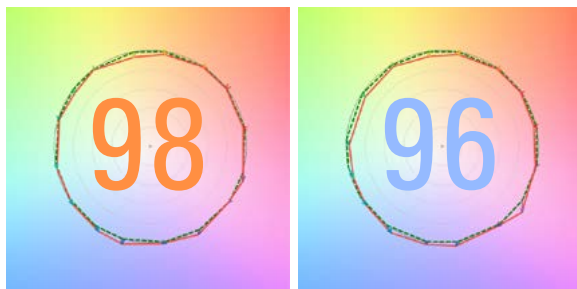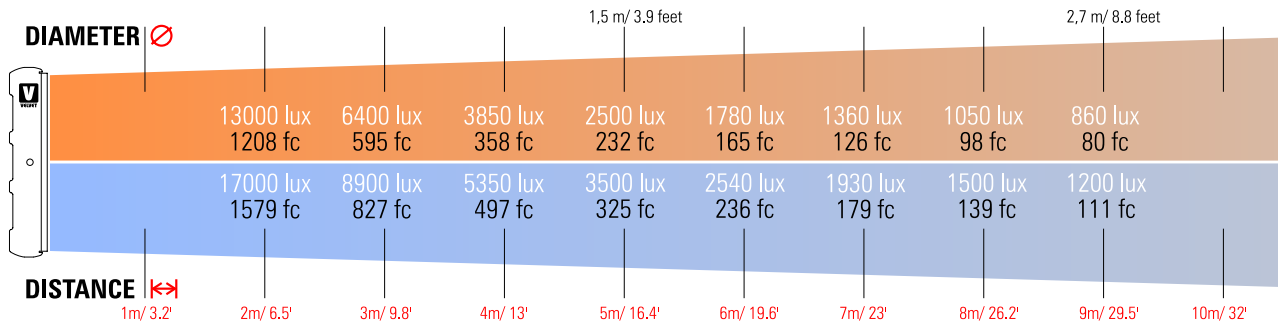

### CCT 3220K

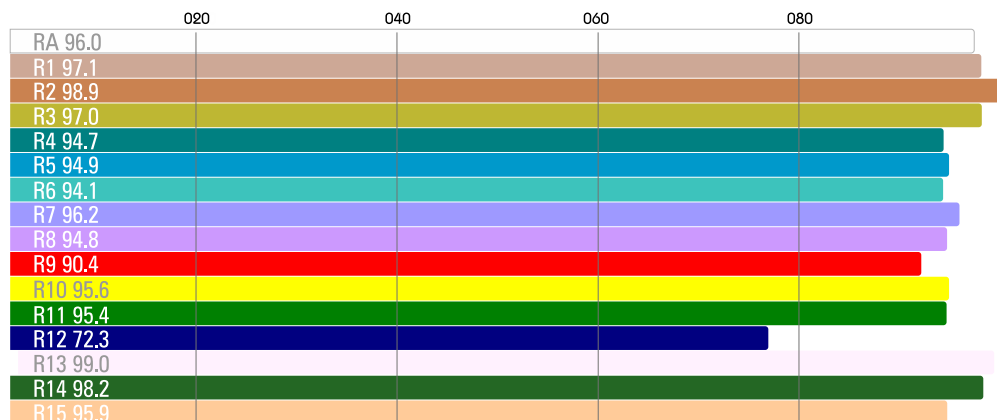

### CCT 5440K

# VELVET Power 2 Spot 15° IP54

Ref.: VP2IP54

Datasheet: June 2021 / Page 4



## ACCESSORIES

### POWER SUPPLY



VP2IP54-PSU

### BATTERY ADAPTERS



VLOCK

VL2-




VL2-GOLD


### BEAM CONTROL



VL2-RB



VP2-D25



VP2-D50



VP2-D100



VP2-DVL



VP2-FBAG



VL2-SG



VL2-SG20




VL2-SG60



VL2-SB



VL2-SGXSB



2X1-RABBITREC



OCTA-SBR05

### TRANSPORT



VL2-BAG



VL2-CASE

### RIGGING



VL2-QLS



VL2-YPO

### REMOTE CONTROL



VL-RC